

VISION



Lightweight athletic safety shoe designed specifically for light industry including warehousing, transport and garbage collectors. Workers who clock up big miles on their feet and want to minimise wear and tear on their footwear. The heat welded exoSHIELD upper ensures a seam free upper for maximum comfort and durability.



PRODUCT DETAILS			
CODE	BLACK		MKOVISIONBBFXXX
SIZES	USA	UK / AUS	EUR
	7-14	6-13	40-47
WEIGHT	SIZE 10 AU/UK: 489g		Size 11 US: 1.08lbs
OUTSOLE	RUBBER		
TOECAP	COMPOSITE		
UPPER	SYNTHETIC MESH		
APPROVED STANDARDS	AS/NZS 2210.3 (CLASS I S1 SRC)		
	EN - ISO 20345 (CLASS I S1 SRC)		
	ASTM F2413-11 (M/I/75/C/75/SD)		
	BENCHMARK CERTIFICATION		
	AS/NZS 2210 AUSTRALIAN /NEW ZEALAND STANDARDS EN - ISO 20345 EUROPEAN STANDARDS ASTM F2413 AMERICAN STANDARDS		



AS/NZS 2210 Australian /New Zealand Standards
EN - ISO 20345 European Standards
ASTM F2413 American Standards



COLOURS

BLACK

SAFETY FEATURES



- Composite Toe
- Slip Resistant
- Fuel Oil Resist
- Anti-static
- Scuff Cap
- Low Catch Sole



PERFORMANCE SYSTEMS

SYST-M®

The performance requirements of the foot and ankle are the foundation of our design process. Workplace specific requirements and design features to minimise injuries are overlaid with the performance demands of the foot and ankle. This unique design philosophy is epitomised in our SYST-M® stamp.

articulatedFIT™

Upper design system to allow the natural movement of the foot and ankle from heel strike to toe-off.

exoSHIELD

External TPU welded overlay to be seam free and provide support and durability.

WIDEcap

Wide anatomical shaped toecap to reduce rubbing and nerve impingement.

KEY FEATURES

COMPOSITEToecap

Lightweight, metal free, nonconductive, insulating and airport friendly safety toecap that complies with Australian/New Zealand (AS/NZ S2210), European (EN-ISO 20345) and American standards (ASTM F2413-11).

slipRESIST-C

Sole slip resistant to soap (SLS) on ceramic tiles and glyceryl on steel plate.

ANTI-STATIC

Minimises static electricity build up for safety in volatile environments.

fueloil/RESIST

Sole resists breakdown to fuel oil.

LOWcatchsole

Low profile sole at the toe to reduce the risk of tripping.

ScuffCAP

- Improves durability in high wear zones.

exoSHIELD

External TPU welded overlay to be seam free and provide support and durability.

HAZARD SOLUTION GUIDE


TRIPS & FALLS

Lightweight footwear to reduce fatigue of the leg muscles that lift the toes. LOWcatchsole to improve swing phase ground clearance at the toe to reduce the risk of tripping.


COMBUSTIBLE MATERIALS

ANTI-STATIC certified footwear minimises static electricity build-up for safety in volatile environments. Metal-free footwear can reduce the risk of spark ignition.

FIT GRID

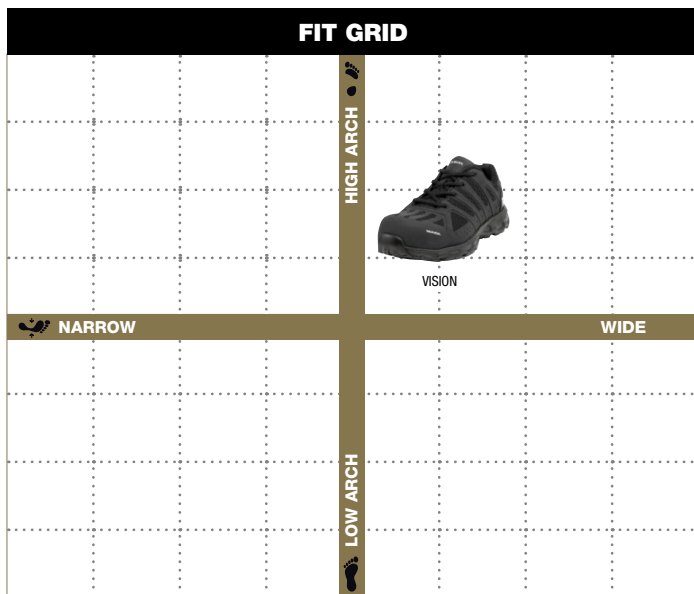

SOLE SELECTION GRID

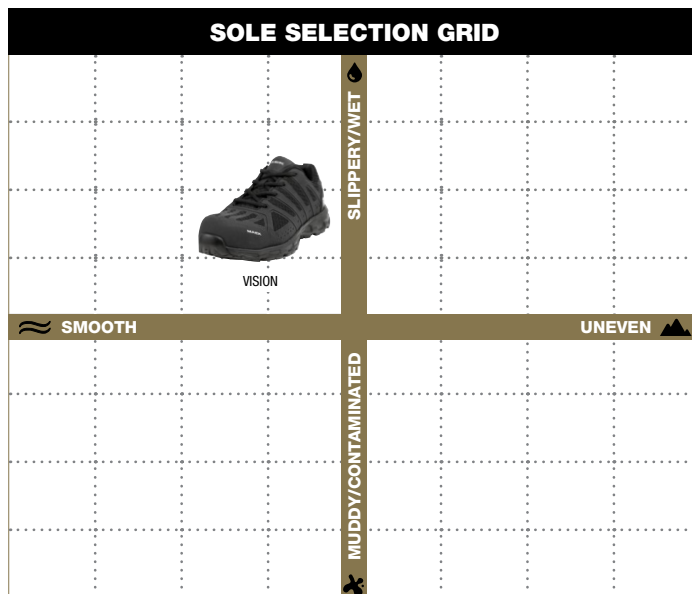

DISCLAIMER: Every reasonable effort has been made to ensure the accuracy of the product information in this document. This document must not be regarded as an infallible guide. **Mack™** accepts no responsibility in this regard. As product details may change from time to time please contact **Mackworkwear.com** to gain the latest information.

MACKWORKWEAR.COM

The Mack® trademarks are registered rights of the AB Volvo Group and are used pursuant to a license. All products are manufactured under license by Bunzl Brands and Operations Pty Limited.

**DESIGNED TO ENDURE.
MADE TO MOVE.
WORN TO PERFORM.**