

FULL BODY HARNESS

BH01120K

Full fire resistant harness manufactured from a special webbing which consists of 60% Nomex, 40% Kevlar. The Nomex outer ensures the webbing is fully fire retardant and the Kevlar inner fibres ensures that the webbing has excellent strength properties.

The braking strength of the web exceeds 26kN or 2.6 tonnes. This web passes the NFPA 1981 heat and flame tests.

Material and Construction


- 44mm special webbing which consists of 60% Nomex, 40% Kevlar.
- Zinc plated forged rear D Ring with stand out feature
- Zinc plated forged 2 bar 3 bar buckles.
- Colour fast webbing
- Labelling fully protected by Clear PVC

Application and Usage

- The fire retardant Nomex/Kevlar webbing make the harness ideal for use in Welding and other flame/high heat applications.
- Fall Arrest - Use in conjunction with a shock absorbing lanyard or inertia reel device attached to the Front Loops or rear D Ring
- Restraint Technique - Use in conjunction with an shock absorbing lanyard to rear D Ring or both front loops together to limit access to fall situations.
- Recovery & Rescue using both front loops connected together.

Testing and Quality Control

- AS/NZS 1891.1:2007 Certified Product
- 100% visually inspected and proof loaded
- All raw materials conform to relevant safety standards

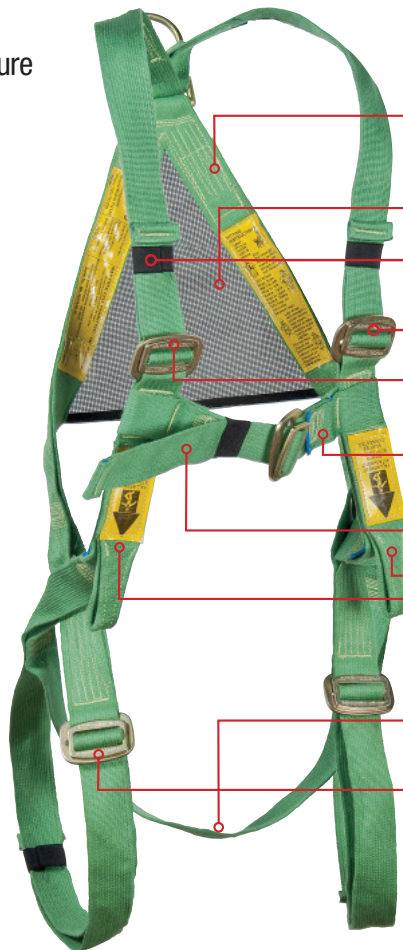

Features

- Computer controlled stitch pattern gives uniformity
- Breathable mesh panel gives the harness form and aids in correct donning
- UV Stabilised Webbing titles
- All metal components batch numbered for full traceability
- All buckles easily adjustable
- Chest strap keeps shoulder straps correctly located
- Fire resistant, Cut resistant Nomex/Kevlar webbing.
- Fall arrest attachment points shown in park position
- Sub pelvic strap prevents harness 'peeling' off the body in the event of a backwards, crouched fall position
- All buckles fully open for unhindered first aid access





Features

- Full fire resistant harness manufactured from a special webbing which consists of 60% Nomex, 40% Kevlar. The Nomex outer ensures the webbing is fully fire retardant and the Kevlar inner fibres ensures that the webbing has excellent strength properties. The breaking strength of the web exceeds 26kN or 2.6 tonnes. This web passes the NFPA 1981 heat and flame tests.
- Front and rear fall arrest attachment points, a large “stand off” rear D Ring and convenient frontal fall arrest loops facilitate an easy means of attachment.
- Fully adjustable leg, shoulder and chest straps, affords a secure fit and optimal comfort.
- Rear breathable mesh panel, allows the harness to take shape and affords easy fitting.
- Clear and protected instructional labelling, allows for easy understanding of applications for attachment points, and to assist with fitting of harness.
- Front loops parking position, enable the fall arrest rated attachment points to be secured (via Velcro), away for convenience and comfort. Front loops must be used together.
- Forged Buckles and a forged rear D Ring provide the optimum level of safety, providing strength and a better protection over stamped alternatives. Also minimises “creep” of the harness under normal wearing.
- Sub-pelvic strap prevents harness “peeling off” in the event of a fall providing enhanced safety, and assists with distributing the forces from a fall.
- Harnesses are proof loaded and given a dedicated final inspection process prior to release. This attention to detail allows us to provide “peace of mind”.

Code: BH01120K

Description: BH01120 Full Body Harness c/w Front and Rear Fall Arrest Attachment points

Weight: 1.5kg

Package Dimensions:

Barcode Number:

Accessories: BA0303 Telephone Holder, BA00014 Tool Lanyard, BA0300 Harness storage bag, BA00005 Shoulder Pads, BA00024 Trauma Relief Straps, BA0302 Bolt Bag, BA0301 Multi Tool Bag, BA00004L Leg Pads (pair)
(Tool Loops & Clips are available upon request.)

